

Product description


The cameras and devices for CCTV are typically 12VDC. This also helps them feed battery without needing to connect to the network. The RE-PS2B battery has been designed for this very purpose and has a pocket-sized, great for devices that are to be worn or held in hand.



Package Contents

- Battery
- 220VAC power supply
- Cavetto output 12VDC power supply wire output power
- 5VDC

Connections

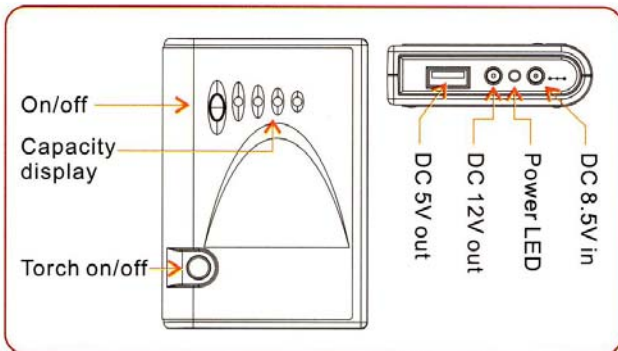

Main technical data

Product	Pocket Rechargeable Battery
Capacity	2000mA to 7.4 VDC
Output Voltage	12V and 5V DC
Input Power	8.5VDC
Maximum load	12VDC 550mA 5VDC 450 mA
Charging time	5 hours
Operating temperature	- 5 ° .. + 40 °
Weight	145 gr.
dimensions	96x68x22 mm.

Installation and wiring

- Connect the power supply to the network and to the DC socket - 8.5V IN. Leaving the battery charge for at least 5 hours in order to achieve the full charge
- Press the ON / OFF button. If the charge is completed all 4 Power LED will light up.
- Connect the device to be fed. The battery has two outputs from 5VDC and 12VDC which can also be operated simultaneously. For the exit 12VDC is available a standard 5.5 mm plug, while for the 5VDC output of 3 mm.
- Press the ON / OFF button to turn the device on.
- Press the ON / OFF button to check the battery charge status
- Press the ON / OFF button to prevent battery discharge even if you disconnect the supplied equipment.
- TORCH Press the button to switch the side LED flashlight

maximum load connectable

The maximum load capacity is applicable

12VDC Output: 550 mA

5VDC output: 450 mA Verify

the absorption equipment from food before connecting.

indicative Autonomy

- 12V / 550 mA .. autonomy 130 min. 5V / 450 mA .. autonomy 420 min. 12V / 80 mA + 5V / 450 mA .. autonomy 210 min.
-